



5G Connectivity. Instant Reliability





Easy Integration 5G with Starlink

- Bond multiple Starlink connections together
- Load Balance your Starlink with other internet services (5G/LTE, Cable, Fiber, FWA)
- Optimize your network with additional features requested specifically by Starlink





Made for Fixed Wireless Access (FWA) with 5G

- Designed for use with MSP 5G/LTE Gateway devices
 - Bond various FWA together (AT&T / T-Mobile / Verizon)
 - Load Balance different internet sources (Cable, Fiber, 5G/LTE)
- Tether your phone with Wi-Fi WAN or USB

Long Term Support

- Firmware is constantly updated to patch vulnerabilities and improve performance
- Futureproof your network as Peplink never ends support for older devices







peplink


A Game Changer with Peplink App

- With a valid PrimeCare subscription, take advantage of all of SpeedFusion features without the need for an advanced network setup
- Easy to set up and use with our Companion App

Key **B** One 5G Benefits

Dual WAN SpeedFusion Built-in 5G/LTE architecture keeps you cellular modem backs up technology seamlessly connected even when bonds multiple Internet your primary wired one of your Internet lines connection or serves as connections into one goes down your primary high-speed more reliable Internet

Use Cases

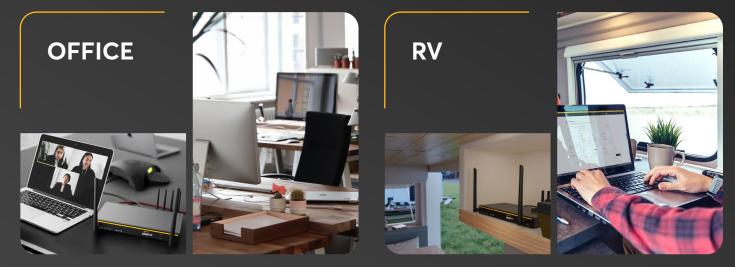

fixed-wireless connection





Specifications

WAN Interface	2 x 10/100/1000M Ethernet 1 x Embedded Cellular Modem with a Redundant SIM Slot 1 x USB-C Interface	Antenna Connectors Power Input	4x SMA Cellular Connectors 2x RP-SMA Wi-Fi Antenna Connectors Power Port: 10V – 30V DC AC Adapter: AC Input 100V–240V / DC Output 12V
LAN Interface Wi-Fi Interface	4x 10/100/1000M Ethernet Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 6, 2X2 MIMO	Power Consumption Dimension	7W (nominal), 19W (max. without USB-C output 4) 10.31 x 6.33 x 1.31 inches / 262 x 161 x 33.5 mm
SpeedFusion features	Wi-Fi WAN and/or AP Hot Failover ¹ / Smoothing ¹ / Bandwidth Bonding ¹	Weight Operating Temperature	1.7 pounds / 756 grams - 40° – 113°F / - 40° – 45°C
Number of SpeedFusion VPN Peers	2/51	Humidity Certifications	10% – 90% (non-condensing) FCC, CE, RoHS
Router Throughput SpeedFusion VPN Throughput	1Gbps	Package Content	1x B One 5G 4x LTE/5G Antennas 2x Dual Band Wi-Fi Antennas 1x 12V 3A 4 Pin Power Supply (ACW-672)
- No Encryption - 256-bit AES Recommended Users	400 Mbps 200 Mbps 1-150	SIM Options	Nano-SIM (4FF) Peplink eSIM BYO eSIM (2 profiles)
AP Controller	Standard	Warranty	1-Year Limited Warranty
Maximum Number of AP Supported	30 / 50 ²		
Cellular Data Rate ³ (Downlink /Uplink)	5G: 3.4 Gbps / 900 Mbps CAT-20: 1.6 Gbps/ 200 Mbps		

Requires a PrimeCare subscription, complimentary for the first year.
 Available with licence add-on (AP-LC-50)
 Theoretical maximum data rates.
 USB-C Output : 5V at 2A can be delivered to power the MAX Adapter or other USB dongles for USB WAN.

Specifications are subject to change without notice.



Ordering Information

Product Code

B-ONE-5GN-T-PRM Embedded Modem(s): 1 x 5G

B-ONE-5GN-T-PRM-3Y (3 Years of PrimeCare+ Included) Embedded Modem(s): 1 x 5G

Regions

Global*

*US Carrier Certifications: AT&T, T-Mobile, Verizon (C-Band), FirstNet

Global*

*US Carrier Certifications: AT&T, T-Mobile, Verizon (C-Band), FirstNet

5G (SA & NSA) Sub 6Ghz:

5G Bands

n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n70, n71, n75, n76, n77, n78, n79

5G (SA & NSA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n70, n71, n75, n76, n77, n78, n79

LTE Bands

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

Featured Add-on

Product Code	Description
PRM-B-1Y / PCP-B-1Y	PrimeCare B / PrimeCare+ B (1-Year)
PRM-B-2Y / PCP-B-2Y	PrimeCare B / PrimeCare+ B (2-Year)
PRM-B-4Y / PCP-B-4Y	PrimeCare B / PrimeCare+ B (4-Year)
ACW-791	Peplink 4-Pin to USB-C Power Cable
ACW-634	10ft DC Power Cable
ACW-235	Indoor LTE/5G Very Wideband Cellular Antenna
ACW-341	Dual-Band Indoor Wi-Fi Omni Antenna in Black (RP-SMA)
ANT-SLM-40G-S-B-6	Slim 40G - 4x4 MIMO 5G Ready Cellular Antenna System with GPS (Black)
ANT-MB-42G-S-W-6	Mobility 42G - 4x4 MIMO 5G Ready Cellular and Wi-Fi Antenna System with GPS (White)
ANT-MB-42G-S-B-6	Mobility 42G - 4x4 MIMO 5G Ready Cellular and Wi-Fi Antenna System with GPS (Black)



Deep Dive

Software	Pepwave MAX Firmware	Networking	NAT and IP Forwarding
			Static Routes
WAN	Support for PPPoE, Static IP, DHCP		Port Forwarding
	WAN Link Health Check		Many to One, One to One NAT
	Bandwidth Allowance Monitor		NAT Pool
	Support for Dynamic DNS services		SIP ALG, H.323 ALG
			UPnP, NAT-PMP
LAN	DHCP Server for LAN Clients		
	Extended DHCP Option	AP Controller	Support for Pepwave AP Series
	DHCP Reservation		Auto AP Discovery
	DNS Proxy for LAN Clients		Auto AP Firmware Management
	VLAN on LAN Support		AP Profile Configuration
			Wi-Fi Usage Statistics
Security	Stateful Firewall		······································
	DoS Prevention	Captive Portal Support	Support for Wired and Wireless LAN clients
	Web Blocking		Support RADIUS Authentication
	The Dioeking		Time and Usage Quotas on Open Access Mode
Complete VPN Solution	SpeedFusion VPN/SpeedFusion		Built-in Customizable Splash Page
complete vi il solution	Hot Failover		Built in customizable splasm age
	Site-to-Site VPN	Device Management	Web Administrative Interface
	256-bit AES Encryption	Device Management	Command Line Interface
	 Pre-shared Key Authentication 		InControl Cloud Management
	Dynamic Routing		Email Notification
	, ,		Active Client & Session Lists
	X.509 Certificate Support *		
	IPsec VPN (Network-to-Network) ^		Bandwidth Usage Statistics
			Syslog Service
Advanced QoS	Individual Bandwidth Limit		SNMP v1, v2c and v3
	Application Prioritization		
	 SIP, HTTPS, VPN QoS 		

Custom Application QoS